



Ready to go with what you can rely on!


Aurora A8 使用说明书 (CN)

产品特征

- 采用聚碳酸酯透明壳体，轻巧坚固耐用
- 使用日本日亚 219C 灯珠，4500K 中白光色温，显色指数高达 90+
- 两种侧灯组合满足不同使用需求
- 内置 Micro USB 充电且带充电指示
- 130mAh 可充电锂聚合物供电
- 快速充电，45 分钟即可充满
- 侧按开关设计，有效防止误触
- 人体工程外观设计，便于单手操作及提供更加的握持感
- 板载温控，保护核心元器件
- 不锈钢双向可拆卸抱夹，尾部设有伞绳孔便于 DIY 携带
- IP65 防水等级

尺寸

长度: 54.8 mm
直径: 14.5mm
重量: 11.7g (含电池)



包装配件: 挂绳, 使用说明书, 不锈钢抱夹, USB 充电线, 充电口盖子

电池规格

锂聚合物电池	尺寸	标准电压	容量
可充电	501030	4.2 V	130 mAh

产品规格

灯珠: Nichia 日亚 219C
色温: 4500K 显色指数 (CRI): 90+

侧灯:

- 黄灯+红灯+蓝灯
- UV 灯+红灯+白灯

档位/规格	灯珠	月光档	低档	中档	高档
	Nichia 219C	0.5 Lm	10Lm	120 Lm	350
		48 小时	220 分钟	65 分钟	40 分钟
	780 cd (坎德拉)				
	60m				
	1.5m				
	IP65				

侧灯					
	光源	黄灯	红蓝闪	红灯/UV 灯	红闪
输出/续航	黄灯 红灯 蓝灯	16Lm/5 0 分钟	12Lm/2.5 小时	635nm/14 小时	0.8Lm/28 小时
	UV 灯 红灯 白灯	/	/	365nm/1 小时	12Lm/3 小时

注: 上述参数在实验室测试所得, 因使用环境和手电批次会有所差异。

充电

- 打开位于尾部的 USB 充电口连上充电线充电
- 充电指示灯: 充电中为红色, 电池充满时即为蓝色
- 充电时间: 45 分钟 (充电电流 350mA, 充电电压 5V)
- 电压低于 2.6V 时, 充电指示灯会持续亮红灯提醒充电
- 截止电压: 2.4V

警告!!

- 当手电开启状态时请勿直视发光光源 (LED)
- 请勿照射人眼或动物眼睛
- 年龄低于 12 岁的儿童请在监视人的陪同下使用本产品

质保服务

- 保修期: 2 年
- 保修期后, 若需维修仅收取相应零部件的费用, 免人工费

深圳锐孚装备技术有限公司

官网: www.RovyVon.com

邮箱: info@RovyVon.com

地址: 广东省深圳市宝安区西乡街道宝源路 2007 号宗泰未来城 702.



操作说明

一键即亮

按住开关不放进入瞬亮 (高亮 350 流明), 松开即灭

主灯

- 开机
- 1. 双击开机进入月光档 (0.5 流明)
- 2. 单击切换档位循环: 低-中-高
- 关机
- 1. 任何档位下长按开关 0.3 秒关机
- 2. 任何档位下工作超过 3 分钟, 单击开关关机

侧灯


A8Y (黄灯+红灯+蓝灯)

- 3 击开关进入侧灯红蓝闪烁
 - 单击切换档位循环: 红蓝闪-红闪
- 4 击开关进入侧灯黄灯
 - 单击切换档位循环: 黄灯-黄灯慢闪


A8U (UV 灯+红灯+白灯)

- 3 击开关进入 UV 档
 - 单击切换档位循环: UV 灯-红灯-红闪
- 4 击开关进入白色阅读灯, 单击关机


高亮档曲线

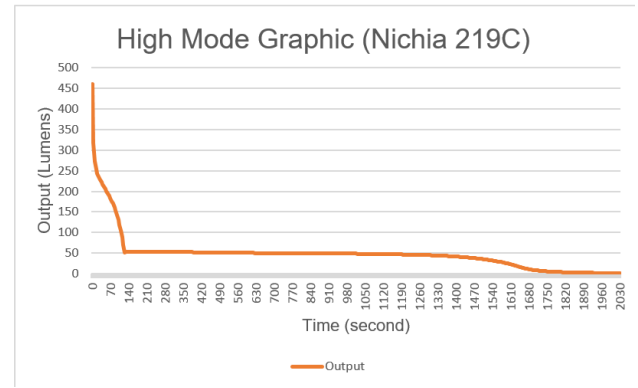

产品图示








正视图

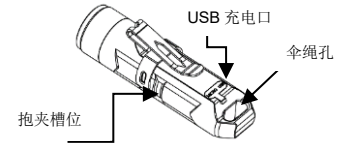

后视图

抱夹安装指引

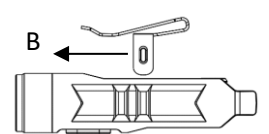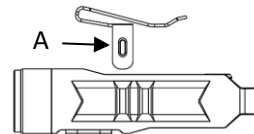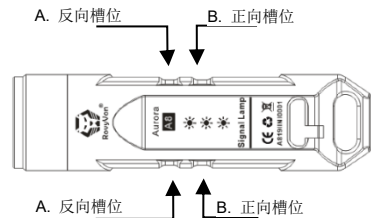



Ready to go with what you can rely on!

Aurora A8 User Manual (EN)

Primary Features

- Transparent polycarbonate durable body
- Nichia 219C R9050 LED, max output 350 lumens
- 90+ CRI. 4500K neutral white
- Sidelights option: UV+Red+White; Amber+Red+Blue
- Built-in Micro USB charging port with charging indicator
- 130mAh Li-polymer rechargeable battery
- Quick charge in 45 minutes
- Side switch prevents accidental activation
- Ergonomic design for better grip and one-handed operation
- Built-in temperature controller
- Two-way clip included and tail paracord hole
- IP65 water resistance


Dimensions

Length: 54.8 mm

Diameter: 14.5mm

Weight: 11.7g (Battery included)

Accessories: Lanyard, user manual, stainless steel clip, USB cable, extra USB cover



Battery

Lithium polymer battery	Dimensions	Standard voltage	Capacity
Rechargeable	501030	4.2 V	130 mAh

Product Parameters

LED: Nichia 219C

Color Temperature: 4500K CRI: 90+

Sidelight:

- Amber + Red + Blue
- UV + Red + White

Mode Specification	LED	Moonlight	Low	Med	High
	Nichia 219C	0.5 Lm	10Lm	120 Lm	350
		48 Hrs	220 min	65min	40min
	780 cd				
	60m				
	1.5m				
	IP65 water resistance				

Side Light					
	Light source	Amber	Red/Blue flash	Red/UV	Red Flash
Output/Time	Amber Red Blue	16Lm/50min	12Lm/2.5h	635nm/14h	0.8Lm/28h
Output/Time	UV Red White	/	/	365nm/1h	12Lm/3h

Note: The above mentioned parameters are approximate and may vary between flashlight and environment.

Charging

- Open the Micro USB cover and connect a cable to charge as shown in the diagram below
- Charging indicator: Red is charging, Blue is fully charged
- Charging time: 45 minutes (350 mA / 5V)
- When the battery voltage is lower than 2.8V, the indicator will be constantly on reminding to charge the light
- When the battery voltage is lower than 2.4V the light will stop working

Warning!

- Do not look directly into the light when it is switched on.
- Do not point the light at human or animal eyes.
- Do not permit children to use the flashlight unsupervised.

Warranty Service

- Two year international warranty.
- After the free maintenance period has expired, the maintenance service will charge for material expense only, free of labor expenses.

RUNFREE EQUIPMENT TECHNOLOGY (HONG KONG) CO., LIMITED

Website: www.rovyvon.com

E-mail: info@rovyvon.com

Address: UNIT 04, 7/F, BRIGHT WAY TOWER, NO.33 MONG KOK ROAD, KOWLOON, HONG KONG.



Operation Instruction

Momentary ON

Press and hold for momentary on (High), release to turn off.

Primary Light

Power ON

1. Double click to turn ON at Moonlight mode (0.5lm)
2. Click to cycle through Low – Med – High

Power Off

1. Long press (0.3s) to turn off at ANY mode
2. Click to turn off if the light works over 180 seconds at one mode

Sidelight


A8Y (Red/Blue/Amber)

3. Triple click to turn ON with Red/Blue flash
 - Click to cycle through Red/Blue flash – Red flash
4. 4 clicks to turn ON with still Amber light
 - Click to cycle through still Amber light – Amber beacon


A8U (UV/Red/White)

3. Triple click to turn ON with UV
 - Click to cycle through UV – Red – Red Flash
4. 4 clicks to turn on White reading light, click to turn off


High Mode Graphic

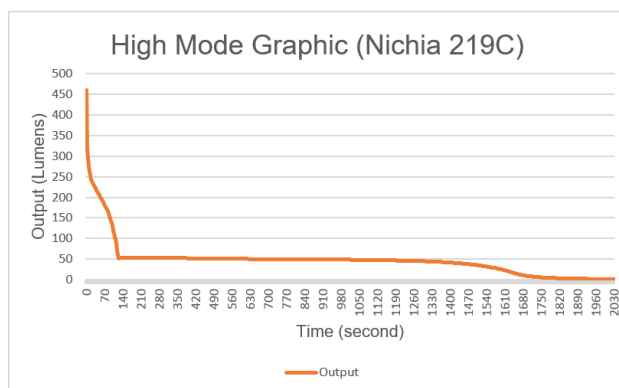

Product illustration



Front View

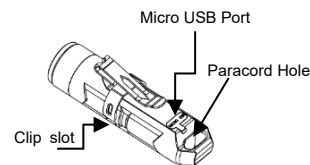

Back View

Clip installation instruction

The clip could be attached in the forward or backward position as your preference

